

BATTERY CHARGER FOR L-SERIES/NP-F (2 CHANNEL)

01 [DISCLAIMER]

Thank you for purchasing TILTA products.

Before using this product, please carefully read this document to ensure that the product has been set up correctly. The final interpretation of this document and all related documents for this product belongs to TILTA. For updates, please visit the official website at www.tilta.com for the latest product information.

TILTA reserves the right to modify any information in this manual at any time without prior notice and without assuming any responsibility.

By using this product, you are deemed to have carefully read the disclaimer and warnings, understood, agreed, and accepted all the terms and content of this statement. You promise to take full responsibility for the use of this product and any consequences that may arise. You commit to using this product only for legitimate purposes and agree to these terms as well as any related regulations, policies, and guidelines set by TILTA.

TILTA is not responsible for any damages, injuries, or legal liabilities caused directly or indirectly by the use of this product. Users should follow all safety guidelines mentioned in this document, including but not limited to those mentioned.

Despite the above provisions, consumer rights are still protected by local laws and regulations are not affected by this disclaimer.


TILTA is a trademark of Shenzhen TILTA Technology Co., Ltd. and its affiliated companies. Product names, brands, and other trademarks appearing in this document are trademarks or registered trademarks of their respective companies.

02 [BATTERY CHARGER OVERVIEW] (Battery Not Included)


[Packing List]

NP-F Battery Series Dual Charger	×1
USB-A to USB-C Charging Cable	×1
User Manual	×1

Charging Slot 1 & 2

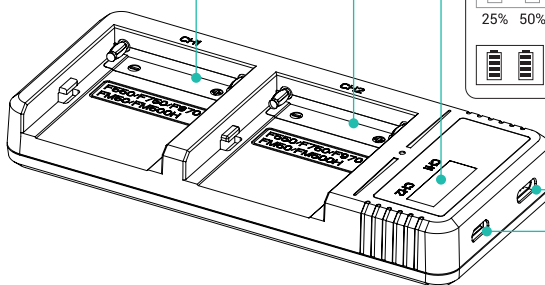

Battery Level Display Screen

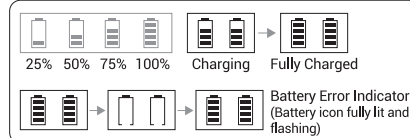

USB-C Port

Micro-USB Port

[Specifications]


SKU	TBC-LS
Dimensions	125×55×18.5mm
Net Weight	62g (charger only) 78g (charger + cable)
Compatible Batteries	NP-F Series (e.g. NP-F550 / NP-F750 / NP-F970 / NP-FM50 / NP-FM500H)

Input Voltage	Output Voltage	
5V \approx 2.4A	8.4V \approx 1000mA × 1 (\pm 50mA) 8.4V \approx 600mA × 2 (\pm 50mA)	Single Charging: 8.4V per channel, 1000mA × 1 (\pm 50mA) Dual Charging: 8.4V per channel, 600mA × 2 (\pm 50mA)
9V \approx 2A (QC)	8.4V \approx 1500mA × 1 (\pm 100mA) 8.4V \approx 1000mA × 2 (\pm 100mA)	Single Charging: 8.4V per channel, 1500mA × 1 (\pm 50mA) Dual Charging: 8.4V per channel, 1000mA × 2 (\pm 50mA)

Environmental Conditions (Ambient Temp: 25°C \pm 5°C)

Operating Temperature: 0°C~40°C	Storage Temperature: -10°C~50°C	Operating Humidity: 35%~95%	Storage Humidity: 45%~85%
------------------------------------	------------------------------------	--------------------------------	------------------------------


03 [USING THE DUAL CHARGER]

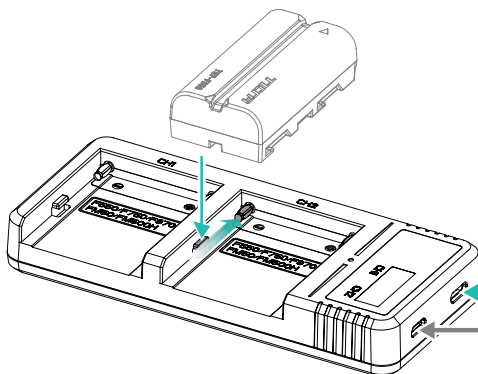

(1). Use the included USB-C cable (included) or Micro-USB cable (optional) to connect the charger to an external power source. The display screen lights up when powered.

(2). Insert the battery into the charger in the indicated direction to begin charging.

(3). When charging is complete, remove the battery in the opposite direction and disconnect the power.



External Power Source

[PRECAUTIONS]

- Store the charger in a cool, dry, and well-ventilated place.
- Do not charge incompatible batteries, as this may damage both the battery and the charger.
- Keep the charger away from water and excessive dust.
- Do not attempt to disassemble or operate the charger if it is damaged.
- Do not insert foreign objects or pour liquids into the charger.
- This product is designed only for NP-F series batteries (e.g. NP-F550 / NP-F750 / NP-F970 / NP-FM50 / NP-FM500H).
- Children should use this product only under adult supervision.

BATTERY CHARGER FOR L-SERIES/NP-F (2 CHANNEL)

01 [免责声明]

感谢您购买TILTA的产品。

使用本产品之前,请仔细阅读本文以确保已对产品进行正确的设置。本文档及本产品所有相关的文档最终解释权归TILTA所有。如有更新,请访问www.tilta.com官方网站获取最新的产品信息。TILTA保留随时修改本手册中任何信息的权利,无需提前通知且不承担任何责任。

一旦使用本产品,即视为您已经仔细阅读免责声明与警告,理解、认可和接受本声明全部条款和内容。您承诺对使用本产品以及可能带来的后果负全部责任。您承诺仅出于正当目的使用本产品,并且同意本条款以及TILTA制定的任何相关条例、政策和指引。

TILTA对于直接或间接使用本产品而造成的损坏、伤害以及任何法律责任不予负责。用户应遵循包括但不限于本文提及的所有安全指引。

即使存在上述规定,消费者权益依然受当地法律法规所保障,并不受本免责声明影响。


TILTA是深圳市铁头科技有限公司及其关联公司的商标。本文出现的产品名称、品牌等均为其所属公司的商标或注册商标。

02 [认识NP-F电池系列双充座](不含电池)


[物品清单]

NP-F电池系列双充座	×1
Type-A转Type-C 充电线	×1
产品说明书	×1

1号和2号充电座

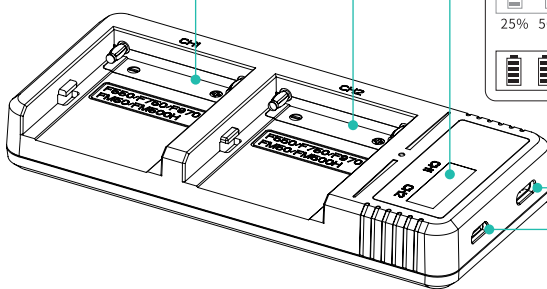

电池电量显示屏

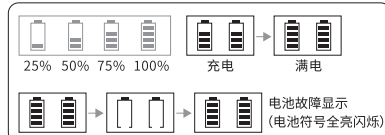


Type-C 输入接口

Micro-USB 输入接口

[规格参数]

型号	TBC-LS	输入电压	输出电压
尺寸	125×55×18.5mm	5V \pm 2.4A	8.4V \pm 1000mA ×1(±50mA) 单充输出时,每通道电压为8.4V \pm 1000mA(±50mA) 8.4V \pm 600mA ×2(±50mA) 双充输出时,每通道电压为8.4V \pm 600mA(±50mA)
净重	62g(双充座) 78g(双充座+充电线)	9V \pm 2A(QC)	8.4V \pm 1500mA ×1(±100mA) 单充输出时,每通道电压为8.4V \pm 1500mA(±100mA) 8.4V \pm 1000mA ×2(±100mA) 双充输出时,每通道电压为8.4V \pm 1000mA(±100mA)
兼容电池	NP-F系列电池 如:NP-F550/NP-F750/ NP-F970/NP-FM50/ NP-FM500H电池等	环境条件(环境温度:25℃ \pm 5℃)	
工作温度: 0℃~40℃		储藏温度: -10℃~50℃	工作湿度: 35%~95% 储藏湿度: 45%~85%

03 [使用NP-F电池系列双充座]

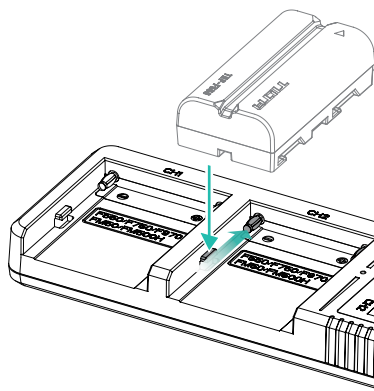

- (1) 通过Type-C充电线(标配)或Micro-USB充电线(选配)外接电源给电池双充座供电,通电时电量显示屏亮起。
- (2) 如图示方向安装电池到电池双充座中,给电池充电。
- (3) 充电完成后,往反方向取下电池并断开电源连接。

Type-C充电线(标配)

或

Micro-USB充电线(选配)

外接电源

[注意事项]

- 将电池双充座存放在阴凉、干燥、通风良好的地方。
- 请勿向电池双充座中插入其他异物或倒入液体。
- 请勿给不合适的电池充电,否则可能会损坏电池和电池双充座。
- 本产品仅适配给NP-F系列电池充电,如NP-F550/NP-F750/NP-F970/NP-FM50/NP-FM500H电池等。
- 保持电池双充座远离水和过多的灰尘。
- 儿童应在成人陪同下使用。
- 电池双充座如有任何损坏,请勿自行拆卸或操作。